



1111 South Talbot St.
St. Michaels, MD 21663
800-933-6936


Fabric Cover Replacement

Remove the existing cover:

Replacing the fabric, with an assistant, should take less than one hour. You may need ladders, a few wrenches and Phillips screwdriver.

1. Retract the awning fully and secure the folded arms by tying them at elbows to the torsion bar (square bar). Next, tie the two halves of the arms together. Both steps are designed to keep the arms fully closed while you work on the awning.

You can confirm your tying skills by extending the awning a foot or two – if the arms didn't move the you can proceed to the next step.

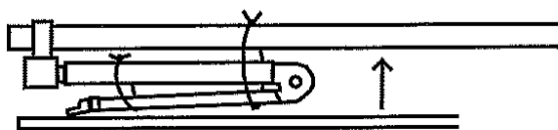

2. Send the awning out approximately one foot. The fabric will start to loosely roll off the top of the roller tube while the framework remains stationary.

3. Remove front bar end caps and fabric locks if equipped. Next, slide the valance out of the front bar, including the PVC tubing.

4. Unroll the awning cover completely with the crank handle until you see the metal roller tube and the slot in the tube is facing towards you.

5. Slide the cover off the roller tube on the opposite side of the motor or gear side.

Installation

1. **DO NOT REMOVE TIES ON ARMS UNTIL NEW FABRIC IS ROLLED UP ON ROLLER TUBE. ARMS ARE SPRING LOADED.**

2. Slide in your new fabric. The fabric has new PVC tubing inside of the pockets.

3. Trim PVC tubing as needed.

4. **Roll up fabric onto the roller tube before cutting ties holding arms of awning.**

Important Notes:

- If awning has a hood, remove end side cover first
- BE SURE ARMS ARE 100% SECURED
- Your cover ships with new PVC tubing. The tubing will need to be trimmed to match the original length of your tubing.
- When installing the cover, be careful at the seams as you slide the fabric onto the roller tube and front bar.

Installing New Fabric with a Motor-

If your motor has a manual over-ride, use the handcrank to unroll the cover completely.

[Adjust Stop Limits on Motor without a Remote to unroll fabric completely.](#)

[Adjust Stop Limits with a Remote to unroll fabric completely.](#)

Any questions?

Give us a call, 800-933-6936